

FIG. 1

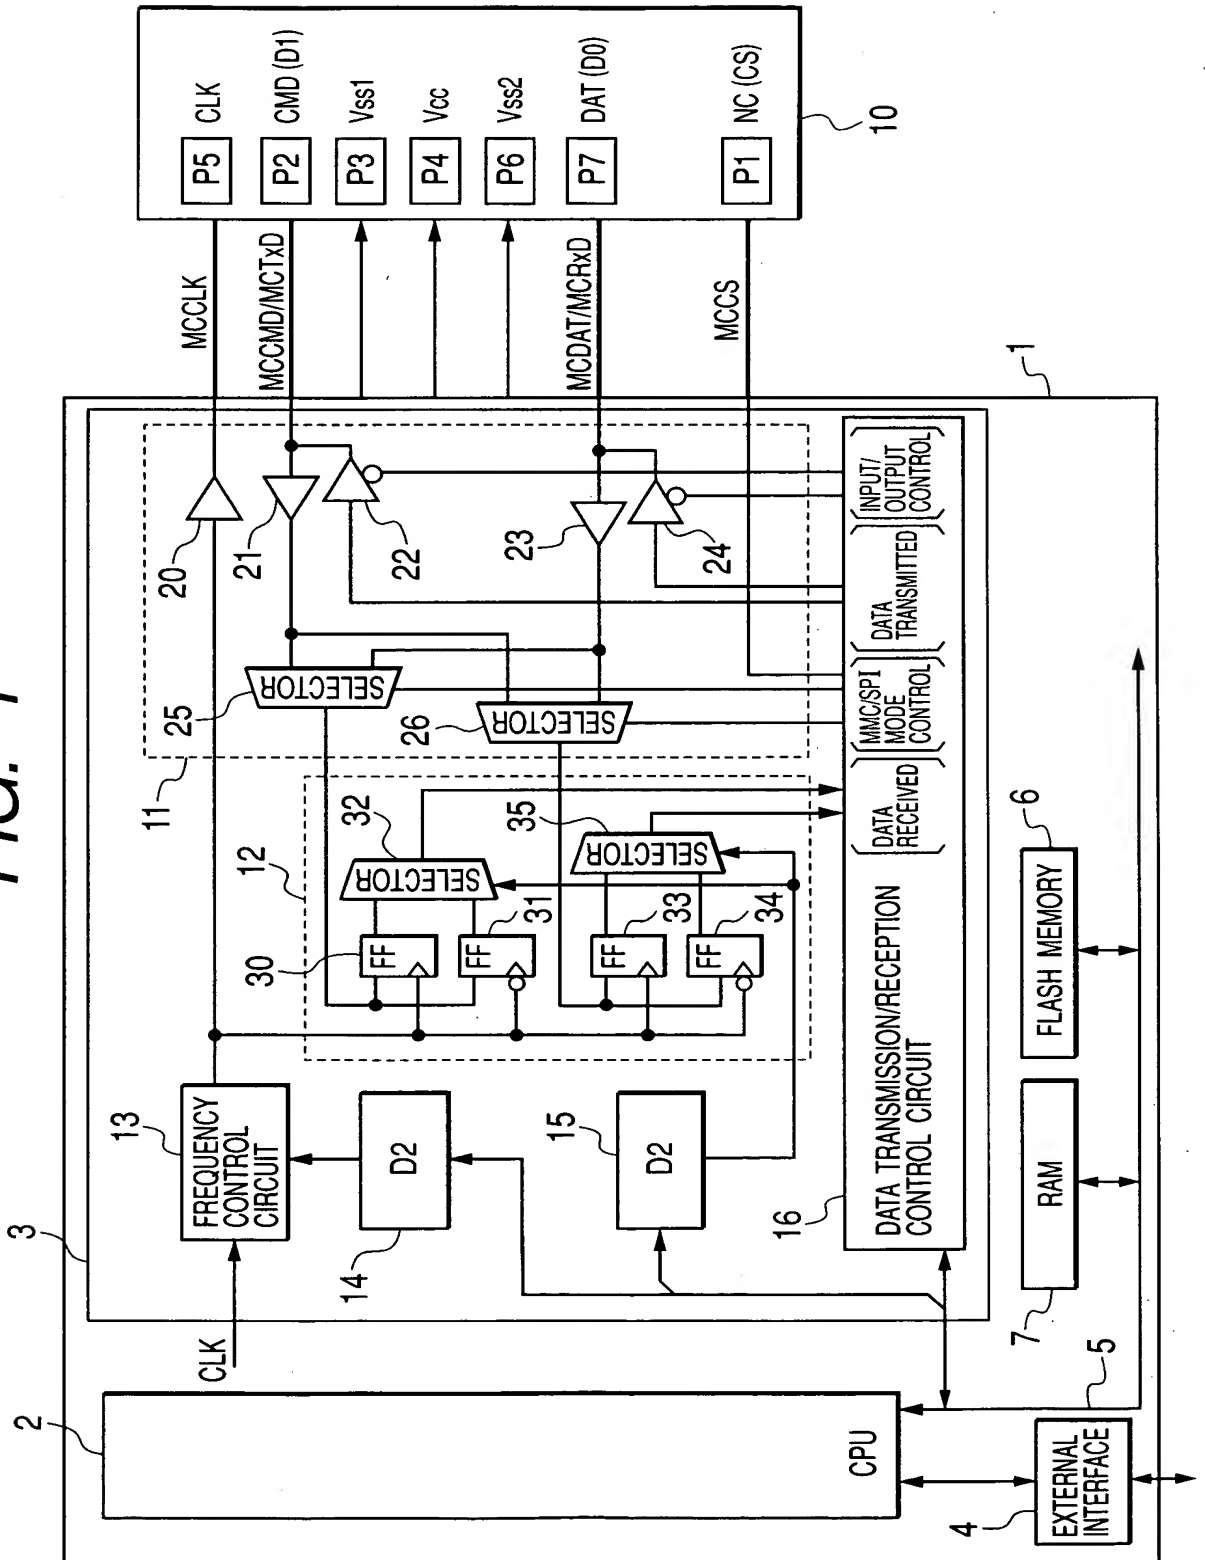
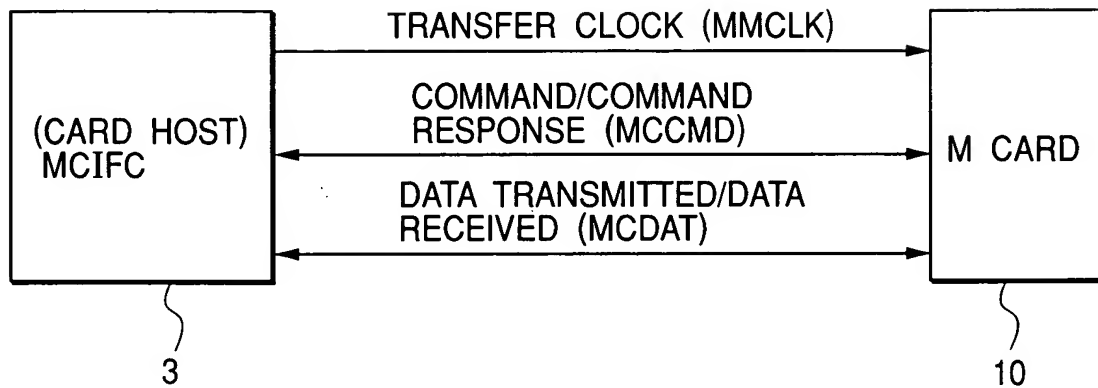


FIG. 2

[CONNECTION IN MMC MODE]

**FIG. 3**

[CONNECTION IN SPI MODE]

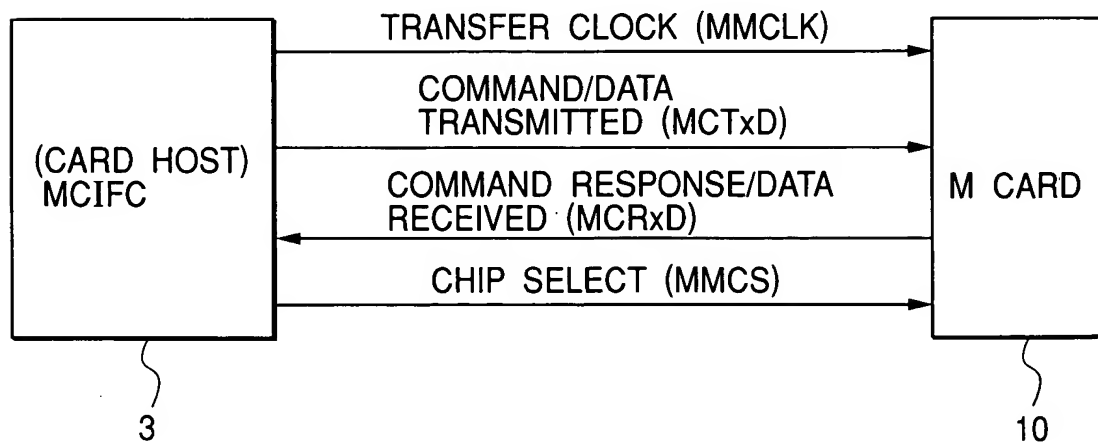


FIG. 4

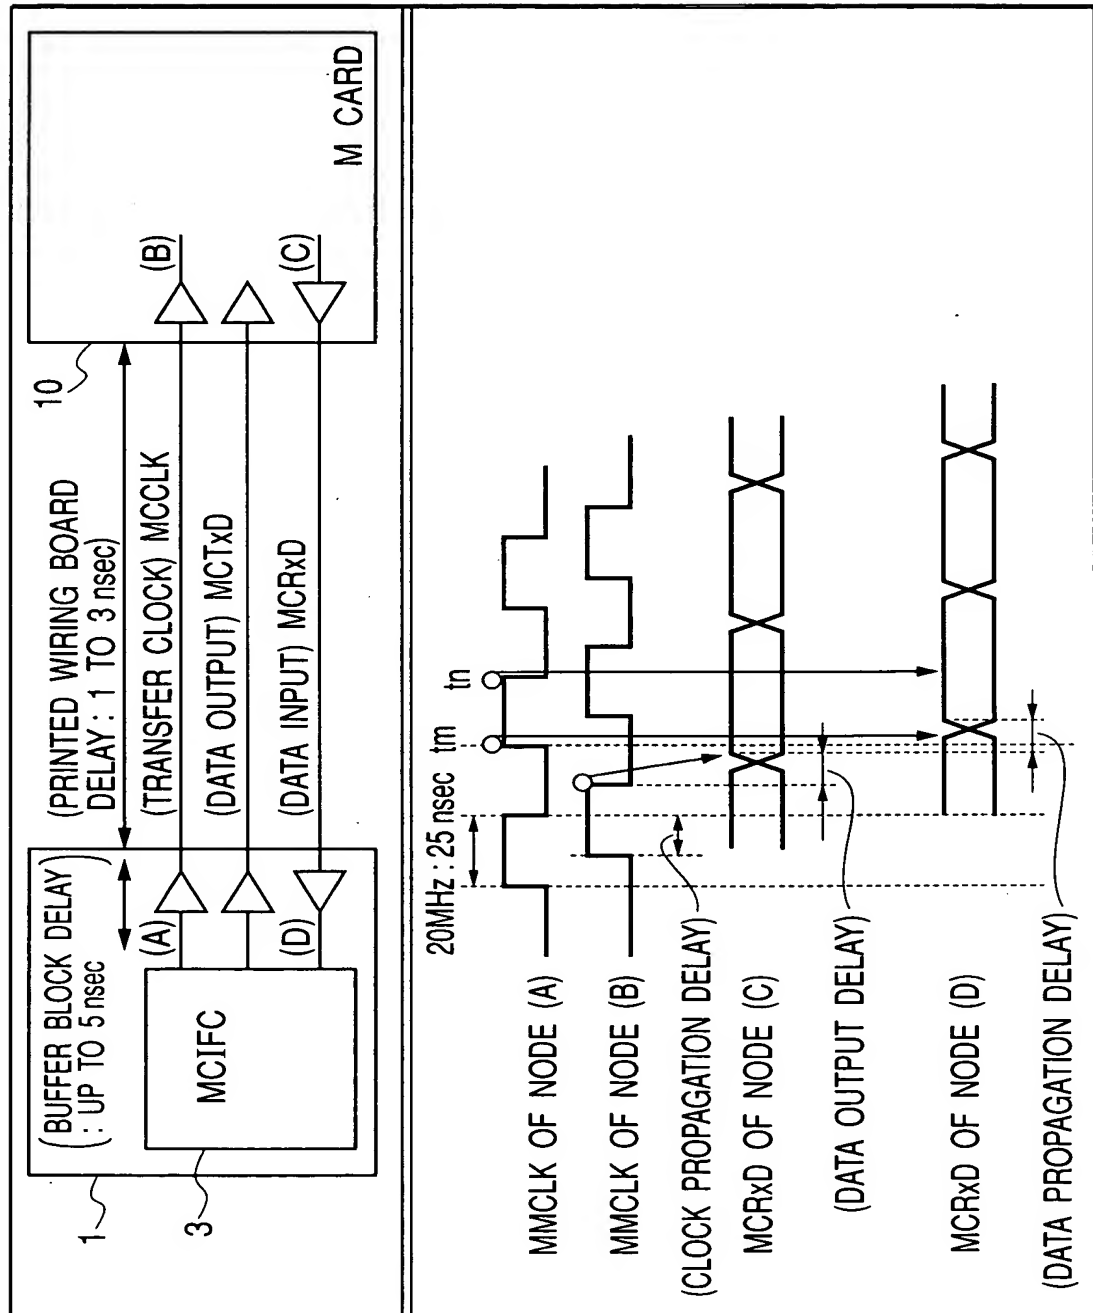


FIG. 5

	CHANGING METHOD		WHAT IS CHANGED			
	AS NEEDED	BY SOFTWARE	FROM HIGH FREQUENCY TO LOW FREQUENCY	FROM LOW FREQUENCY TO HIGH FREQUENCY	FROM RAISING EDGE TO FALLING EDGE	FROM FALLING EDGE TO RAISING EDGE
(1)	○		○			
(2)		○	○			
(3)	○				○	
(4)		○			○	
(5)		○	○:2		○:1	○:3
(6)		○	○:1		○:2	
(7)		○		○:1	○:2	
(8)		○		○:2	○:1	○:3

(NUMBERS DENOTE ORDER OF SWITCHING)

FIG. 6

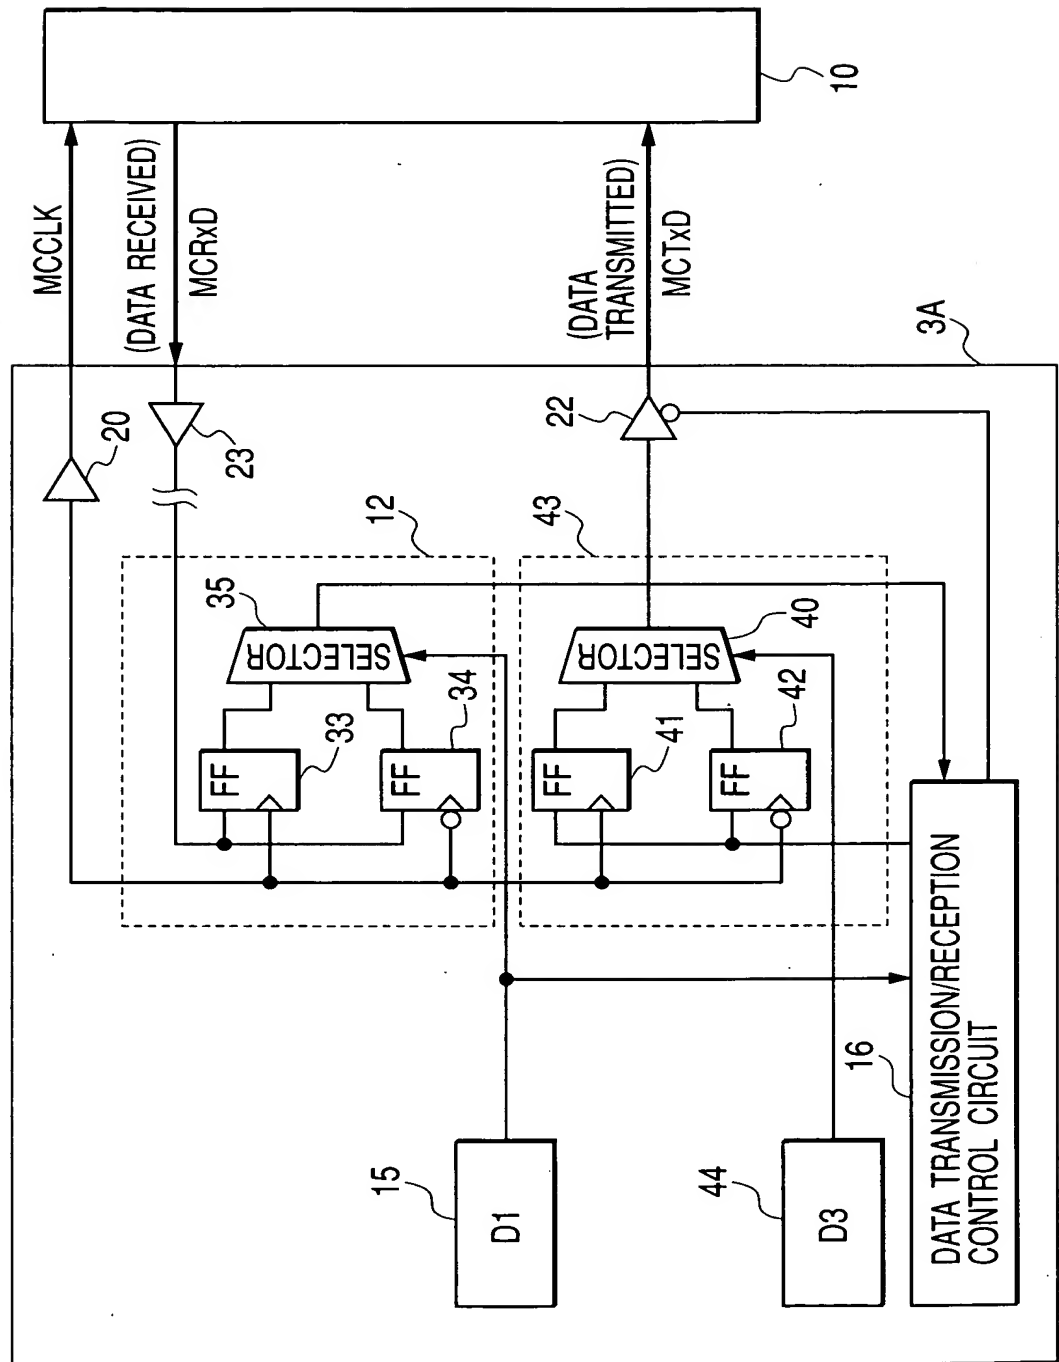


FIG. 7

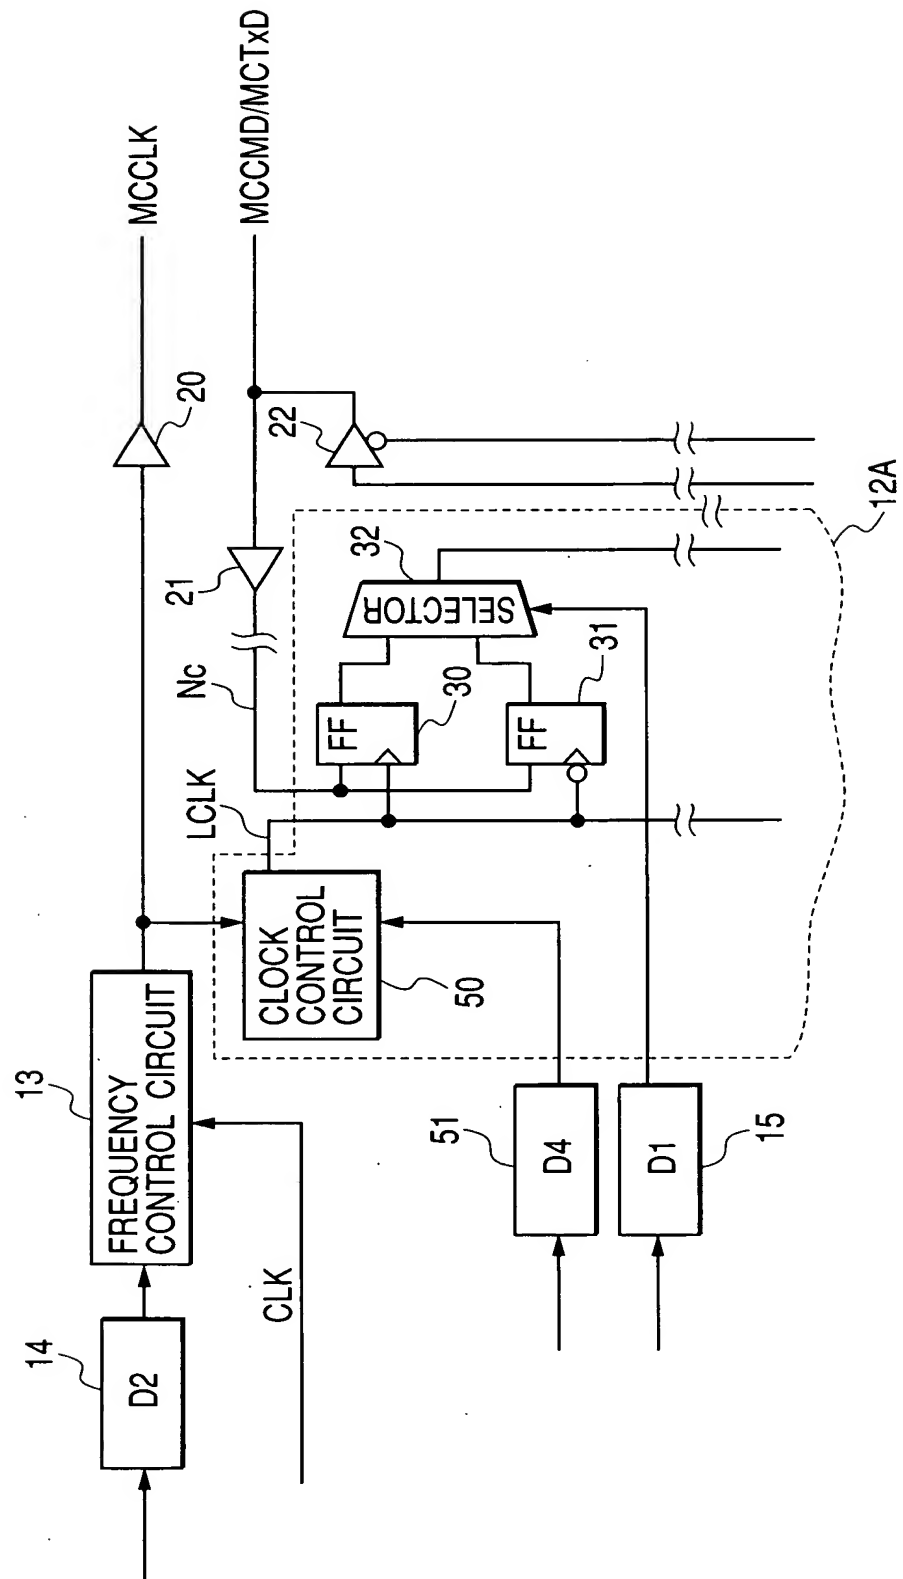


FIG. 8

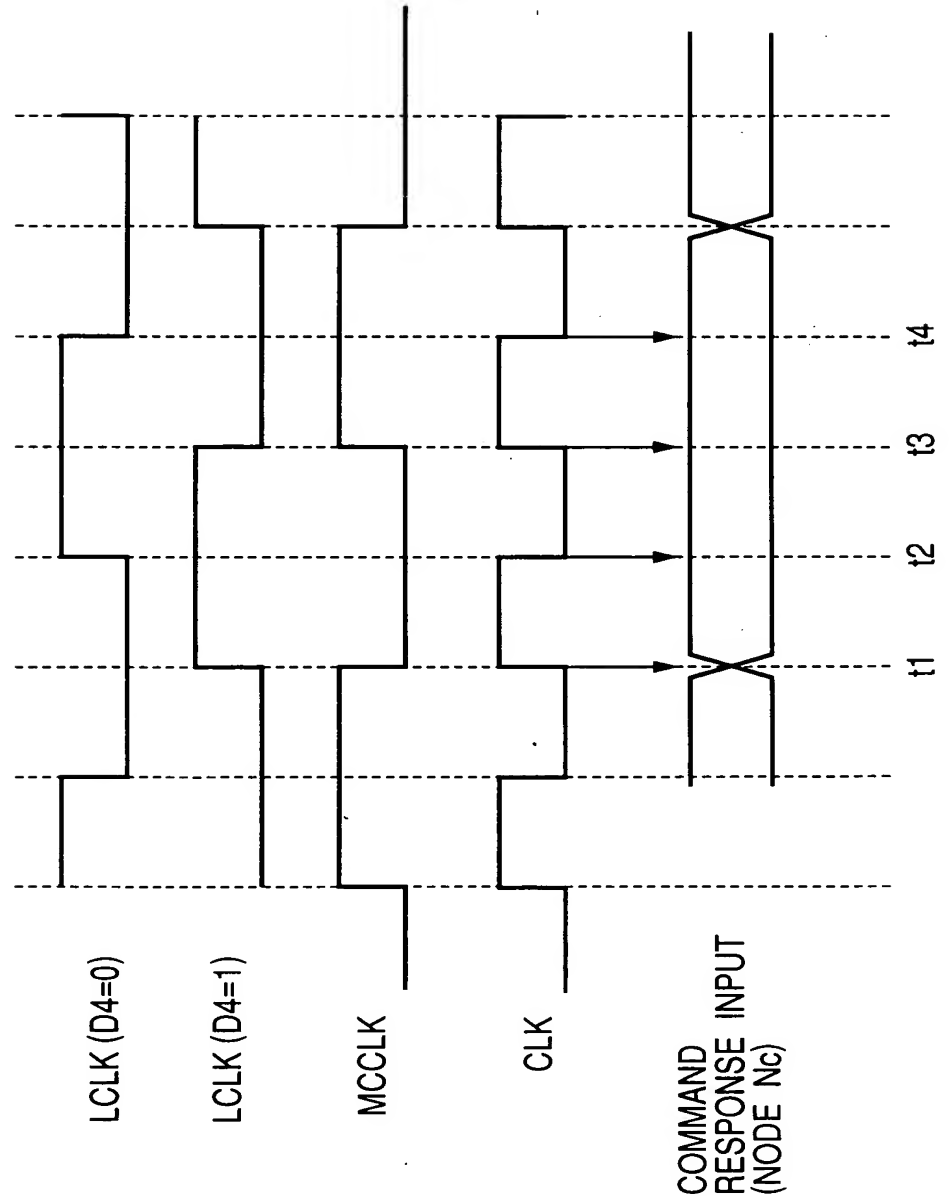


FIG. 9


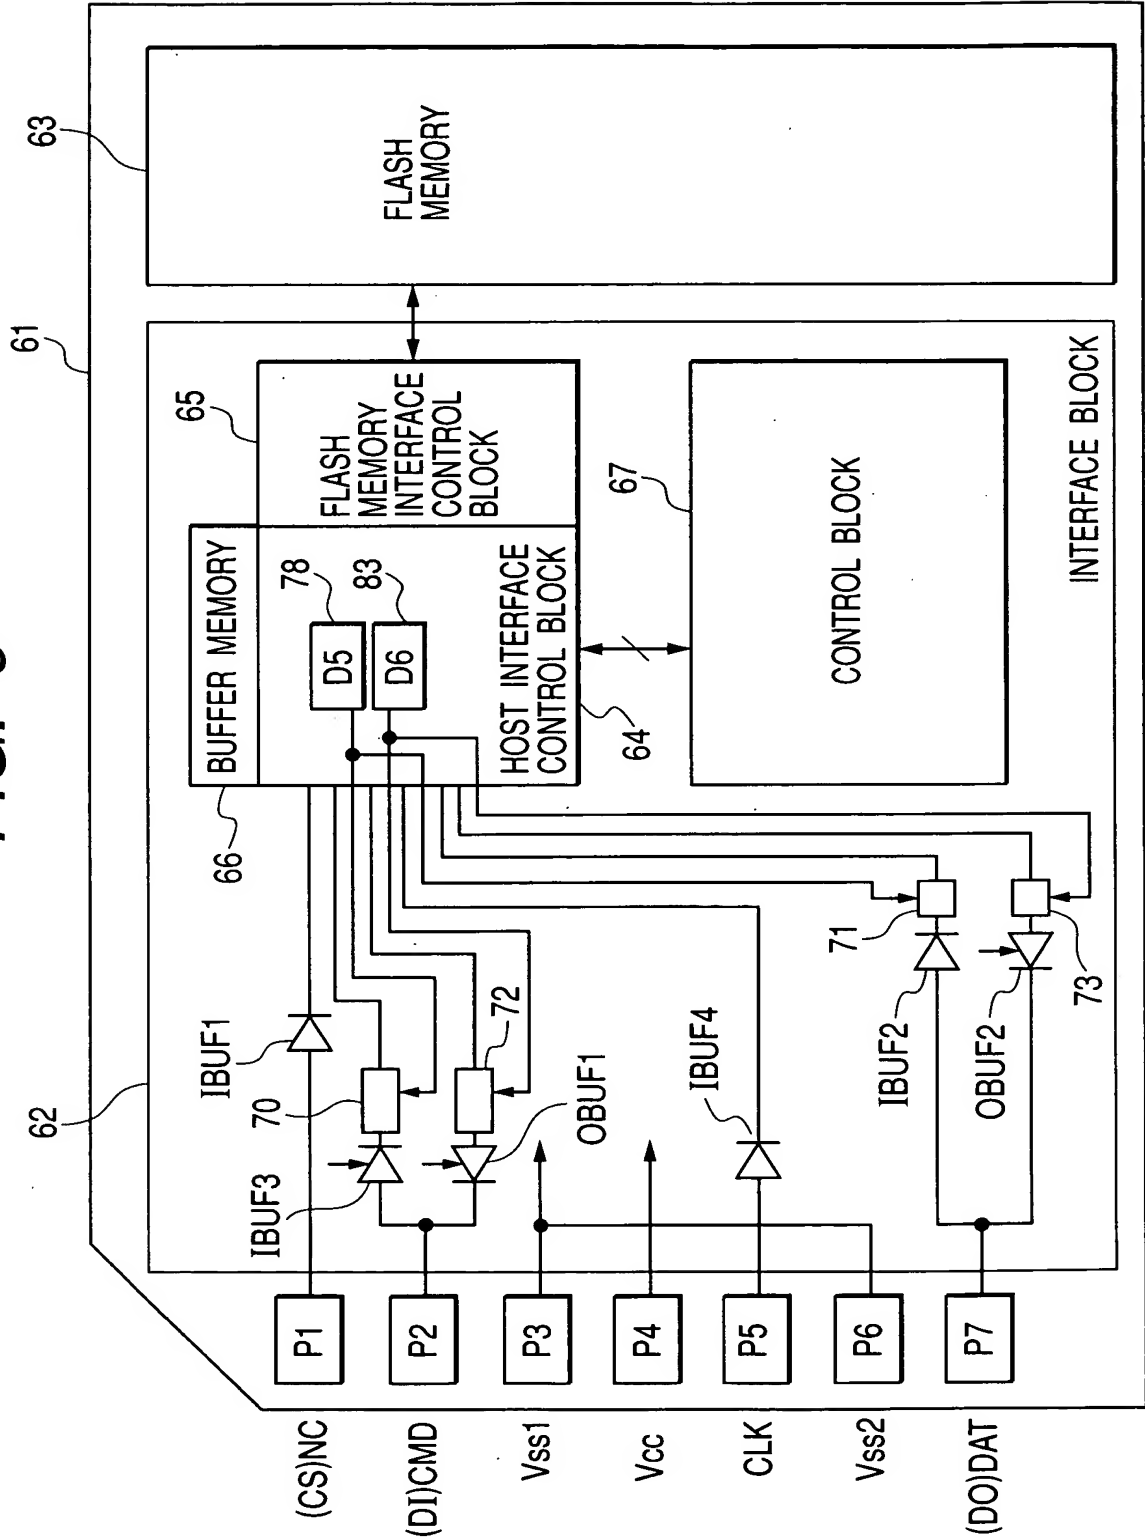


FIG. 10



RES STBY MD0 MD1

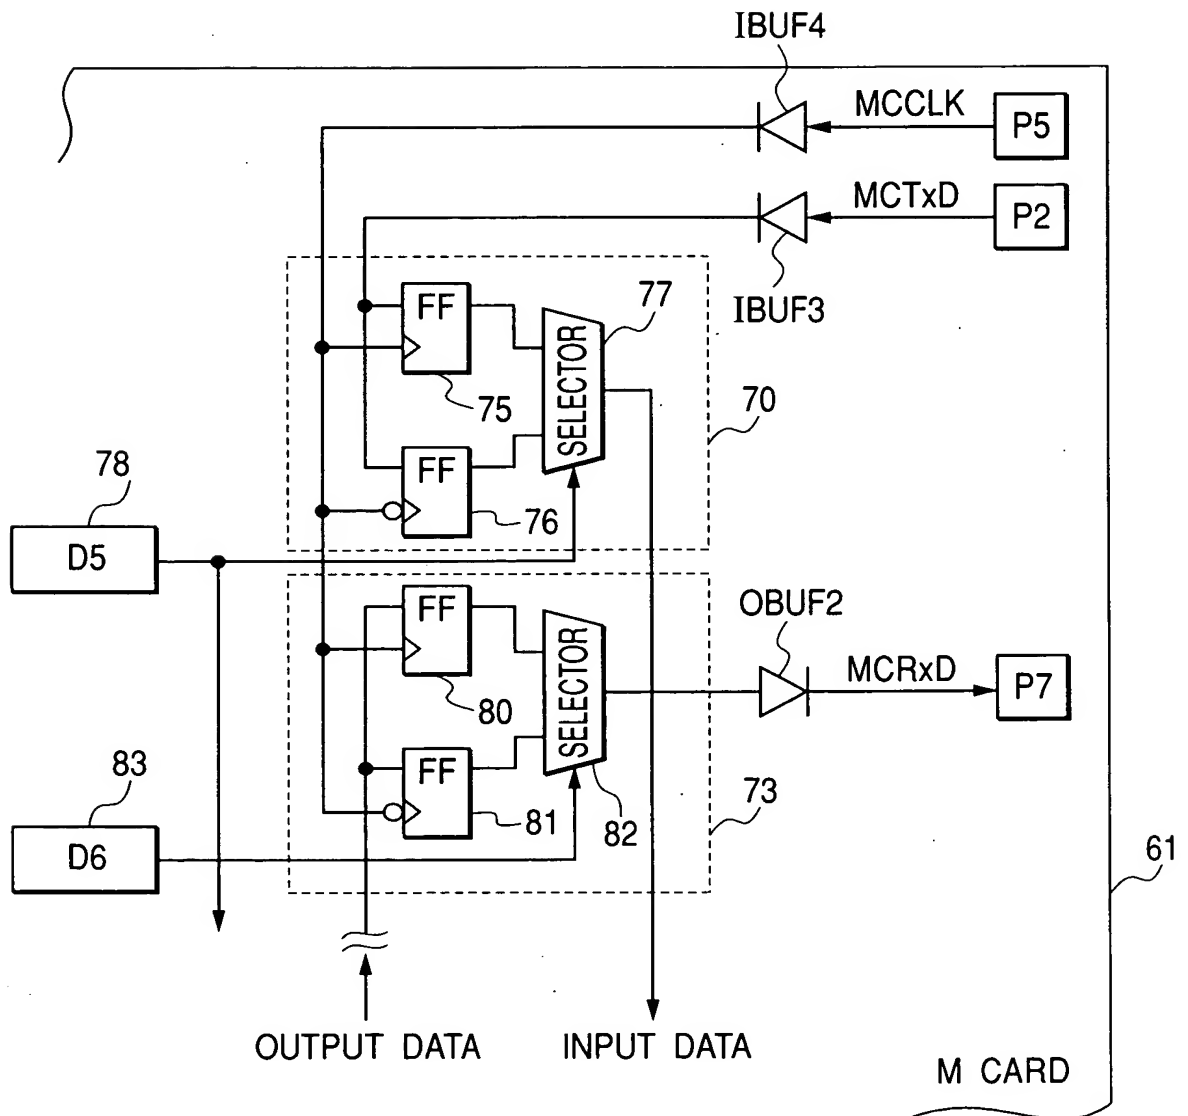